



GL-360C

Around View Camera Kit

Part-Nr. 280204



User Manual

3D Views



3D Front View



3D Rear View




3D Left View



3D Right View

Wiring Diagram

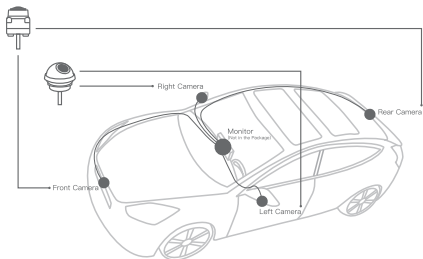

Parameter

PARAMETER	FEATURE	8550M+307/1022
Image Sensors		200MP 1/2.8" SONY IMX307LQR CMOS
Master Control		FULLHAN FH8550M with 3D No Noise
TV System		PAL
Effective Pixels		1920(H) x 1080(V)
Electronic Shutter		AHD 1080P@25FPS
Lens Angle (Diagonal)		210° ± 5°
Lens Angle (Horizontal)		210° ± 5°
Lens Angle (Vertical)		130° ± 5°
F/NO.		1.6 ± 10%
Minimum Illumination		0.01 Lux@F1.2
Waterproof		IP68
Video Output		AHD, 1.0Vp-p, 75Ω
S/N Ratio		90dB
Current Consumption		180 - 200mA
Power Supply		DC 5V
Operating Temperature		-20°C - 80°C, RH95% Max
Storage Temperature		-20°C - 80°C, RH95% Max
Extend Cable (Front/Right/Left) Length		3.5m
Extend Cable (Rear) Length		6.5m

Accessories List



3D视角展示



3D前视



3D后视




3D左视



3D右视

连接线

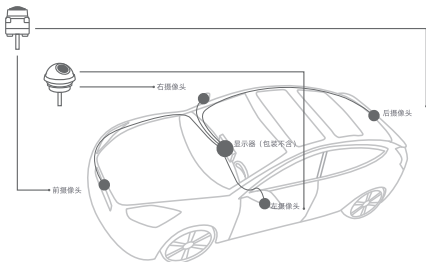

技术参数

参数 \ 配置	8550M+307/1022
图像传感器	200MP 1/2.8" SONY IMX307LQR CMOS
主控芯片	FULLHAN FH8550M with 3D No Noise
视频制式	PAL
有效像素	1920(H) x 1080(V)
电子快门	AHD 1080P@25FPS
对角线视角	210° ± 5°
水平视角	210° ± 5°
垂直视角	130° ± 5°
光圈	1.6 ± 10%
最低照度	0.01 Lux@F1.2
防水等级	IP68
视频输出	AHD, 1.0Vp-p, 75Ω
信噪比	90dB
电流消耗	180 - 200mA
电源供应	DC 5V
工作温度	-20°C - 80°C, 最大相对湿度95%
存储温度	-20°C - 80°C, 最大相对湿度95%
延长线长度 (前/右/左)	3.5m
延长线长度 (后)	6.5m

配件清单

